

Prediction of Water Requirements to Replace Sweat Losses

**Samuel N. Cheuvront, Ph.D., Richard R. Gonzalez, Ph.D.,
Laurie A. Blanchard, Michael N. Sawka, Ph.D.**

U.S. Army Research Institute of Environmental Medicine
Thermal and Mountain Medicine Division
Kansas Street, Building 42
Natick, MA 01760-5007
USA

samuel.n.cheuvront@us.army.mil

ABSTRACT

The Shapiro sweat prediction equation (OSE) was formulated more than two decades ago as: $m_{sw} (g \cdot m^{-2} \cdot h^{-1}) = 27.9 \cdot E_{req} \cdot (E_{max})^{-0.455}$, where E_{req} is required evaporative heat loss and E_{max} is maximum evaporative power of the environment. Although OSE was developed for a limited set of conditions, in practice it is often used outside its boundaries to estimate fluid requirements and generate guidance in military, public health, occupational and sports medicine settings. Military (NATO) and public health (IOM) reports have expressed a need for improved sweating rate prediction models that calculate hourly and daily water needs.

Purpose

The purposes of this study were to 1) determine the accuracy of OSE when widening its boundaries to include cooler environments (2h) and very prolonged exercise (8h), and 2) improve the accuracy of OSE and/or develop a de novo sweat prediction equation with improved accuracy.

Methods

OSE prediction accuracy was determined by comparing measured (m_{sw}) and predicted sweating rates in 39 volunteers during 15 trials that included intermittent treadmill walking for 2h (300 to 600 W, 15 to 30°C; $n = 21$) or 8h (300 to 420 W, 20 to 40°C; $n = 18$). Accuracy was first assessed by comparing m_{sw} and predicted sweating rates (211 observations) using least-squares regression. Mean and 95% confidence intervals for group differences were compared against a ± 0.125 L/h prediction error threshold. The 2h and 8h data were then combined with archived data (total of 101 volunteers, >500 observations), using a variety of metabolic rates over a range of environmental conditions, clothing and equipment combinations and work durations, in an effort to correct OSE and develop a new sweat prediction equation using fuzzy piecewise regression. The corrected and de novo equations were then cross-validated against independent data (30 volunteers; >200 observations).

Results

OSE accounted for more than 70% of the variance in m_{sw} and the SEE was small and uniform around the line of best fit. However, the OSE error was always > 0.125 L/h during 2h and 8h of exercise. A corrected equation (OSE_C): $m_{sw} = 147 \cdot \exp(0.0012 \cdot OSE)$ and a new equation (P_W): $m_{sw} = 147 + 1.527 \cdot (E_{req}) - 0.87 \cdot (E_{max})$ were derived. OSE_C and P_W were 58% and 65% more accurate ($P < 0.01$) than OSE, respectively, for conditions both within and outside the original OSE domain of validity.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE OCT 2010		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Prediction of Water Requirements to Replace Sweat Losses				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Institute of Environmental Medicine Thermal and Mountain Medicine Division Kansas Street, Building 42 Natick, MA 01760-5007 USA				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADA564696. Human Modelling for Military Application (Applications militaires de la modelisation humaine). RTO-MP-HFM-202					
14. ABSTRACT The Shapiro sweat prediction equation (OSE) was formulated more than two decades ago as: $msw (gm-2h-1) = 27.9 E_{req} (E_{max})-0.455$, where E_{req} is required evaporative heat loss and E_{max} is maximum evaporative power of the environment. Although OSE was developed for a limited set of conditions, in practice it is often used outside its boundaries to estimate fluid requirements and generate guidance in military, public health, occupational and sports medicine settings. Military (NATO) and public health (IOM) reports have expressed a need for improved sweating rate prediction models that calculate hourly and daily water needs.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 8	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Conclusion

OSE_C and P_W provide for more accurate sweat predictions over a broader range of conditions. Applications overlap multiple HFM domains and military needs scenarios. Authors' views; not official U.S. Army or DoD policy.

1.0 INTRODUCTION

Effective water management is a key to Force Health Protection and Force Operating Capabilities (5). Health is threatened by fluid deficits (hypohydration), which increase the risk of serious heat illness (1, 5, 6, 7) and fluid surfeits (hyperhydration), which increase the risk of hyponatremia (6, 7, 17). Combat effectiveness declines quickly when water is not available. As a result, drinking water is the largest single potable water planning factor and represents 15% of the total per capita water requirement for all tactical and force structure planning (9). Yet the provision of adequate water is a challenge on the modern battlefield where unit forces are distributed over complex urban terrain extending hundreds of miles (10). As a consequence, smaller units on shorter missions carry their water, which contributes significantly to combat load and reduces fighting effectiveness. Not only do water resupply requirements place support elements at strategic risk, but delivery requires tremendous manpower and vehicle space, making water transport one of the largest logistical supply burdens on the modern battlefield (2, 5, 10). As a result, the ability to accurately predict Warfighter water needs is a key to efficient water consumption planning, Force Health Protection, and Force Operating Capabilities.

The U.S. Army is the DoD executive agent for land-based water resources in a theatre of operations (8). One mission of the U.S. Army Research Institute of Environmental Medicine (USARIEM) has been to develop empirically derived prediction algorithms to estimate water requirements for a variety of situations (2). Although body water is lost through urination and respiration, perspiration (sweat) is the primary avenue for body water losses in populations training and fighting in warm or hot environments. Water losses from sweat increase proportionally with the total thermal load, which includes the heat of metabolism (work intensity \times time interaction), macro-environment (climate) and micro-environment (clothing, vehicle) considerations (18). Sweat losses also vary widely among people due to numerous biological factors (acclimatization, fitness, body size, genetics) (18). Careful and extensive research observation and experimentation (14, 16, 19, 20) is the essential starting point for accurate sweat loss prediction algorithms. However, the myriad of complex interactions among variables that influence sweating rates make all-encompassing experiments difficult and impractical, thus prediction models are essential for comprehensive water planning (15).

The current (original) Shapiro equation (OSE) (20), embedded within generations of broader empirical sweat prediction models (2), resolves the interaction between the requirement for evaporative cooling (E_{req}) and the maximum evaporative capacity of the environment (E_{max}). The OSE equation was derived from a matrix of laboratory experiments that included a range of environmental conditions (ambient temperature 20 – 54°C, and relative humidity 10 – 90%), clothing configurations (insulation or $\text{clo} = 0.74$ to 1.50), and metabolic intensities (approximately 50 – 250 W/m²) of 2h duration. Actual sweat losses were determined from the change in nude body mass corrected for fluid intake and urine output, but no corrections were made for respiratory or metabolic mass losses. This exclusion will overestimate true sweat losses, especially in cooler environments (3, 4). Clothing insulation (clo) and evaporative potential (i_m/clo) in OSE are for antiquated ensembles using static manikins and do not account for changes in clothing wettedness over time (4, 11). E_{req} in OSE also does not account for the realistic inefficiency of sweat evaporation from the skin (11). When these limitations are considered alongside the fact that OSE is frequently used to model sweat losses and water needs well beyond its 2h domain of validity, there is a clear military (2) and civilian (12) need to quantify and improve OSE performance by expanding its boundaries to include modern protective clothing and realistic work durations (> 2h).

2.0 METHODS

OSE prediction accuracy was determined by comparing measured (m_{sw}) and predicted sweating rates in 39 volunteers during 15 trials (A-O) that included intermittent treadmill walking for 2h (300 to 600 W, 15 to 30°C; $n = 21$) or 8h (300 to 420 W, 20 to 40°C; $n = 18$). Accuracy was first assessed by comparing m_{sw} and predicted sweating rates (211 observations) using least-squares regression. Mean and 95% confidence intervals for group differences were compared against a ± 0.125 L/h prediction error threshold. The 2h and 8h data were then combined with archived data obtained from four separate environmental chamber studies and one field study conducted at the U.S. Army Research Institute of Environmental Medicine (USARIEM) and from one environmental chamber study conducted at Defence R & D Canada, Toronto. A total of 101 volunteers (80 men, 21 women), and more than 500 observations were made using a variety of metabolic rates (250 to 800W) over a range of environmental conditions (15 to 41°C), clothing and equipment combinations (BDU, body armor, MOPP) and work durations (2h to 8h), in an effort to correct OSE and develop a new sweat prediction equation using fuzzy piecewise regression. The corrected and *de novo* equations were then cross-validated against independent data (30 volunteers; >200 observations). Additional methodological details can be found in Cheuvront et al. (4) and Gonzalez et al. (11).

3.0 RESULTS

OSE accounted for more than 70% of the variance in m_{sw} and the SEE was small and uniform around the line of best fit. However, the OSE error was always > 0.125 L/h during 2h and 8h of exercise (Figure 1). A corrected equation (OSE_C): $m_{sw} = 147 \cdot \exp(0.0012 \cdot OSE)$ and a new equation (P_W): $m_{sw} = 147 + 1.527 \cdot (E_{req}) - 0.87 \cdot (E_{max})$ were derived. OSE_C and P_W were 58% and 65% more accurate ($P < 0.01$) than OSE, respectively, for conditions both within and outside the original OSE domain of validity. Additional result details can be found in Cheuvront et al. (4) and Gonzalez et al. (11). Figure 2, from Jay and Webb (13), shows the sweat (water) volume over-estimation error associated with using OSE for 2, 4, 6, and 8h of work over a range of possible E_{req} and E_{max} ratios. For an average sized Warfighter (1.8 m^2) working moderately for 8h ($E_{req} = 275 \text{ W/m}^2$) in a hot, arid desert while wearing body armor ($E_{max} = 350 \text{ W/m}^2$), use of OSE would over-predict water needs by 2 L (Figure 2). For an individual Warfighter on a 24h mission, this error adds 2 kg to the fighting load. For a battalion-sized unit, the error adds nearly 500 kg (500 L) of unnecessary water transport. This would also have important ramifications for the transport of water into difficult to reach locations, such as mountainous regions (2).

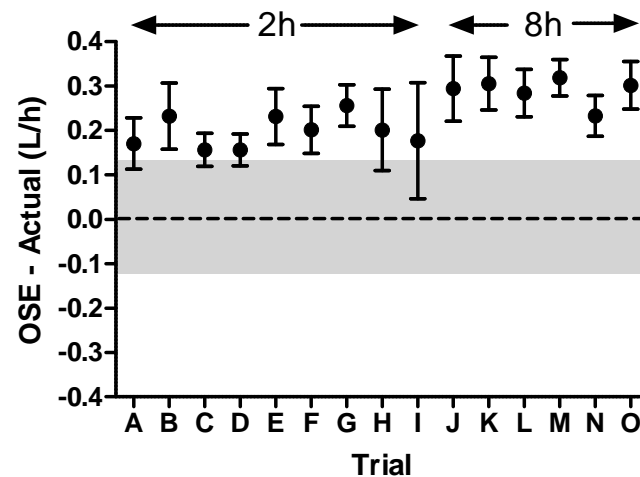


Figure 1: Differences between predicted sweat rate (OSE) and actual sweating rate during 2h (A through I) and 8h (J through O) trials. Data are group (trial) means; bars are 95% confidence intervals. Shaded area represents zone of indifference (± 0.125 L/h) based on the desire to predict sweat losses to within 1L over an 8h work day. From reference 4.

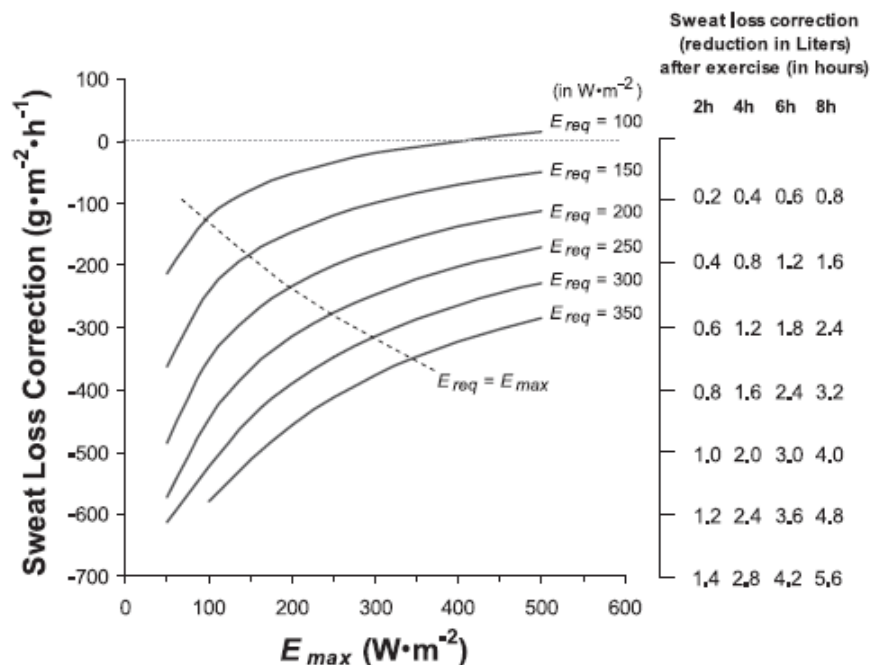


Figure 2: Sweat loss correction (left y-axis) and associated water volume error (right y-axis) observed when using OSE versus OSE_c. Right y-axis volumes represent an overestimate of individual water needs (in liters) over time. From reference 13.

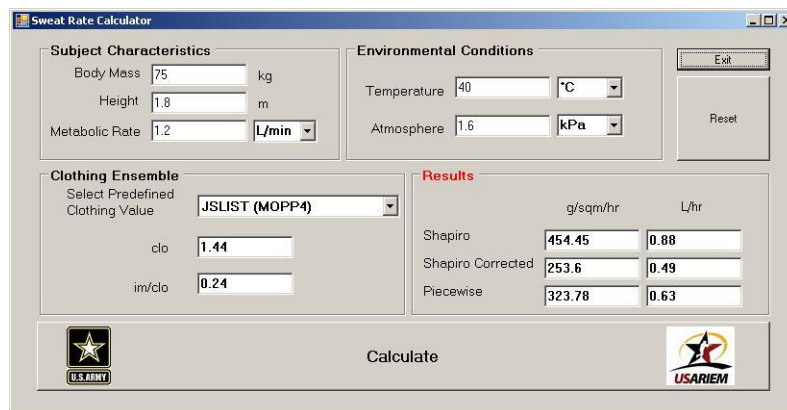


Figure 3: Screenshot of USARIEM executable program run on Microsoft Windows® which requires minimal user-friendly inputs to predict sweat losses (water needs) comparing OSE, OSE_C, and P_W.



Summary Information	
Sweat rate	1.28 liters (43.26 oz.) /hour
Hydration rate % of max:	85.3 %
Total hydration required	0.85 liters (28.84 oz.)
Maximum water loss	1.35 liters (45.65 oz.)

Definitions

Sweat rate Based on the information provided, the rate your body will sweat in order to not be overheated.

Hydration rate % of max The human body can only process approximately 1.5 liters/hr of fluids into sweat. This is value represents how close your sweat rate will be to the limits. The importance of close monitoring of hydration is important especially close to the maximum sweating rate.

Total hydration required Based on the expected duration of your activity, this is sweat rate times number of hours.

Maximum water loss The risk of heat stroke and other problems is extreme when you lose about 2% of your body mass. The maximum water loss is the net amount of fluids that can be lost before a significant increase in heat related injury.

Time before dangerous fluid loss This time represents how long it will take you to lose so much sweat that there is an extreme risk of heat related injury. Fluids must be replaced well before this amount of time in order to exercise safely.

Figure 4: Screenshot of internet program (R.R. Gonzalez & Perception Software, ©2009) incorporating P_W and on-line meteorological data to predict sweat losses (water needs) using minimal user-friendly inputs.

4.0 CONCLUSIONS

OSE_C and P_W provide for more accurate sweat predictions over a broader range of conditions than equations currently in use. Additional validity generalization, extension validity, and bootstrap simulation studies are ongoing and will further improve prediction accuracy. OSE_C is easily migrated into various existing rational and operational thermal prediction models that presently include OSE. Both OSE_C and

P_W can provide Commanders with more accurate forward water planning for larger units and potentially real-time, short term water planning for smaller units. Minimal user-friendly inputs are needed and programs could easily be implemented within various architectures including smartphone, personal digital assistant, or internet applications (Figures 3 and 4). OSE_C and P_W provide greater accuracy in estimating Warfighter water needs, which enhances safety and sustainability and reduces the logistical footprint for water re-supply. Applications overlap multiple Human Factors Medicine domains, military and civilian needs scenarios.

5.0 ACKNOWLEDGEMENTS

The authors thank Sara M. Tenenholtz, Kurt J. Sollanek, and Tejash Patel for their technical assistance with the preparation of this manuscript. The view, opinions, and/or findings contained in this report are those of the authors and should not be construed as an official Department of the Army position, or decision, unless so designated by other official documentation. Approved for public release; distribution unlimited.

6.0 REFERENCES

- [1] Carter R III, et al. Epidemiology of hospitalizations and deaths from heat illness in soldiers. *Med Sci Sports Exerc.* 2005; 37(8):1338-1344.
- [2] Carter, R., Cheuvront, S.N., Montain, S.J., Sawka, M.N. Prediction and validation of Warfighter fluid requirements. NATO Research and Technology Organization HFM-086 Symposium on “Maintaining Hydration: Issues, Guidelines, and Delivery.” Boston, MA, December 10-11, 2003. <http://www.rta.nato.int/>
- [3] Cheuvront SN, Haymes EM, Sawka MN. Comparison of sweat loss estimates for women during prolonged high-intensity running. *Med Sci Sports Exerc.* 2002; 34: 1344-1350.
- [4] Cheuvront, S.N., Montain, S.J., Goodman, D.A., Blanchard, L., and Sawka, M.N. Evaluation of the limits to accurate sweat loss prediction during prolonged exercise. *European Journal of Applied Physiology.* 2007; 101:215-224.
- [5] DeFraités, R. Force Health Protection issues related to water management: Operation Iraqi Freedom and beyond. NATO Research and Technology Organization HFM-086 Symposium on “Maintaining Hydration: Issues, Guidelines, and Delivery.” Boston, MA, December 10-11, 2003. <http://www.rta.nato.int/>
- [6] Departments of the Army and Air Force. Heat stress control and heat casualty management. *TBMED 507/UFPAM 48-152(I)*, Government Printing Office, Washington, D.C., 2003.
- [7] Department of Defense. Medical Surveillance Monthly Report. 2008;15 (3): 2-31.
- [8] Department of Defense Directive 4705.1. Management of land-based water resources in support of contingency operations. 1992.
- [9] Directorate of Combat Developments. Water consumption planning factors. U.S. Army CASCOM, Ft. Lee, VA, 1999.
- [10] Dupont F.J. and Dean, C. Hydration and the modern Warrior’s load. NATO Research and Technology Organization HFM-086 Symposium on “Maintaining Hydration: Issues, Guidelines, and

- Delivery.” Boston, MA, December 10-11, 2003. <http://www.rta.nato.int/>
- [11] Gonzalez, R.R., Cheuvront, S.N., Montain, S.J., Goodman, D.A., Blanchard, L.A., and Sawka, M.N. Expanded prediction models of human sweat loss and water needs. *J Appl Physiol.* 2009; 107: 379-388.
- [12] Institute of Medicine (IOM). Dietary Reference Intakes for Water, Potassium, Sodium, Chloride, and Sulfate. Washington, DC: National Academy Press. 2005; 73-185.
- [13] Jay, O and Webb, P. Improving the prediction of sweat losses during exercise. *J Appl Physiol*; 2009; 107(2): 375-376.
- [14] Kolka MA, Latzka WA, Montain SJ, Corr WP, O’Brien KK, Sawka MN. Effectiveness of revised fluid replacement guidelines for military training in hot weather. *Aviat Space Environ Med.* 2003; 74(3):242-6.
- [15] Massoud TF, Hademenos GJ, Young WL, Gao E, Pile-Spellman J, Vinuela F. Principles and philosophy of modeling in biomedical research. *FASEB J.* 1998; 12: 275-285.
- [16] Montain SJ, Latzka WA, Sawka MN. Fluid replacement recommendations for training in hot weather. *Mil Med.* 1999; 164: 502-508.
- [17] O’Brien, KK. et al. Hyponatremia associated with overhydration in U.S. Army trainees. *Mil Med.* 2001; 166(5): 405-410.
- [18] Sawka MN and Wenger CB. Physiological responses to acute exercise-heat stress. In: *Human Performance Physiology and Medicine at Terrestrial Extremes*, edited by Pandolf, KB, Sawka, MN, and Gonzalez, RR. Michigan: Cooper Publishing Group: 97-151, 1988.
- [19] Shapiro Y, Moran D, Epstein Y. Validation and adjustment of the mathematical prediction model for human sweat rate responses to outdoor environmental conditions. *Ergonomics.* 1995; 38: 981-986.
- [20] Shapiro Y, Pandolf KB, Goldman RF. Predicting sweat loss response to exercise, environment and clothing. *Eur J Appl Physiol.* 1982; 48: 83-96.

